


Product design features:

- Sealed, AGM-technology
- Balanced cyclic life and float life performance
- Wide range of operating temperature
- One-way valve regulated system with flame-arrestor
- Internal gas recombination efficiency 98% - 99%
- Easy for installation, maintenance free product
- Delivered ready for use at 100% of its nominal capacity
- Non-hazardous cargo for ground, sea and air transport
- Fully recyclable product

Mechanical Characteristics		
	SI Units	US Units
Length	518 mm	20.4 inches
Width	276 mm	10.9 inches
Height	242 mm	9.5 inches
Approx. weight	60.0 kg	143.3 lbs

Electrical Characteristics	
Nominal voltage	12 Volts
Nominal Capacity (100H)	250 Ah
Reserve Capacity	425 min
CCA Performance (-18 deg.C)	1400 A [EN]
Electrolyte density	1.280 ± 0.015 g/ml

Battery Layout




Base Holddown



Other Specifications

Terminals	Standard cone
Case color	Black
Lid color	Black
Handles	Yes (2)
QTY/PLT/Layer	18 / 1 / 3

25A and 20 hour discharge characteristics

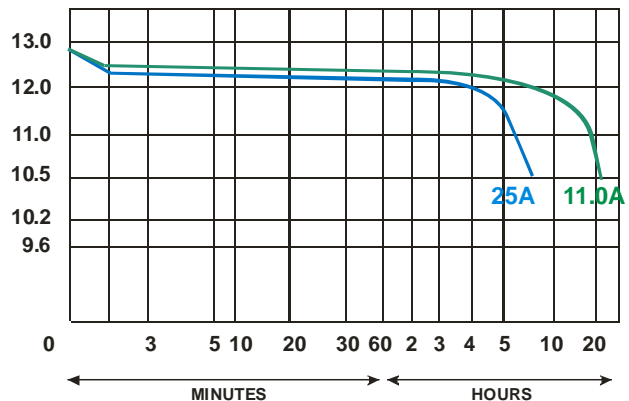

Loading Voltage vs Discharge Time

**Certificates: ISO 9001:2008, ISO 14001:2004,
OHSAS 18001:2007, NATO AQAP 2110**