

12LC-260 12 V 275 Ah



Q-Batteries Akku 12LC-260 battery is a special deep cycle battery which is designed for intensive cyclic discharge usage. Because of the very thick lead plates it's possible to achieve more cycles and longer lifetime.

Application

Electric wheelchair, caravan/marine, cleaning machines, golf cart, vehicle lifts, solar energy system, u.v.m.






Specification

Voltage Per Unit	12 V		
Capacity	275 Ah	@20hr-rate to 1.8V per cell @25°C	
Cells Per Unit	6		
Weight	ca. 74 kg		
Max. Discharge Current	2600 A (5 sec.)		
Internal Resistance	ca. 3.5 m Ω		
Operating Temperature Range Normal	Discharge: - 15°C – 50°C	Charge: - 10°C – 50°C	Storage: - 20°C – 50°C
Operating Temperature Range	25°C ± 5°C		
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.		
Terminal	F14 (M8 bolt)		
Container Material	A.B.S. (UL94-HB)		

Dimensions


520 Length x 268 Width x 220 mm Height

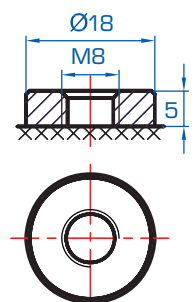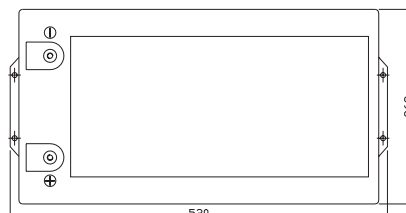


Constant current discharge characteristics: A (25°C)

FV/Time	5 Min.	10 Min.	15 Min.	30 Min.	1 HR	2 HR	3 HR	4 HR	5 HR	8 HR	10 HR	20 HR
9.60 V	708.7	530.8	448.1	292.9	169.0	101.1	69.90	57.28	46.89	32.30	27.31	15.02
10.0 V	688.2	505.1	438.9	288.1	168.2	100.4	69.63	57.02	46.61	32.03	27.05	14.75
10.2 V	667.8	487.3	432.0	285.5	166.7	99.60	69.09	56.75	46.34	31.77	26.78	14.47
10.5 V	599.6	449.6	411.3	278.4	165.1	98.84	68.82	56.22	45.78	31.51	26.52	14.20
10.8 V	541.2	410.0	379.2	266.2	161.2	97.07	66.95	54.90	44.96	30.98	26.26	13.93
11.1 V	462.1	366.4	340.1	249.4	153.1	92.76	64.00	52.24	43.03	29.67	25.47	13.11

Life characteristics of cyclic use

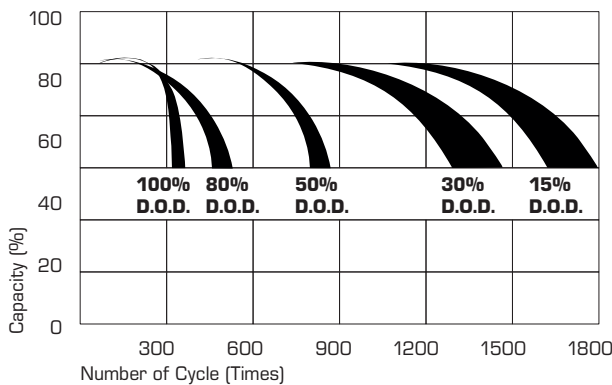

Storage characteristic

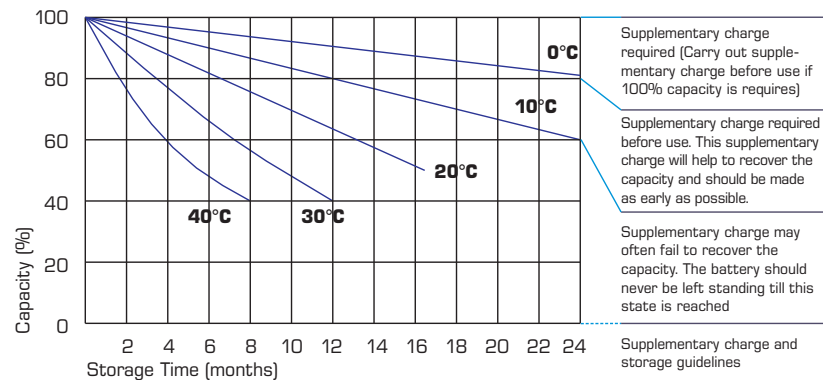

Capacity Factors with different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V & 12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V & 12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Charging Method

Charge the batteries at least once every six months, if they are stored at 25°C

Constant Voltage (V)	-0.2C x 2h + 2.4-2.45V/Cell x 24h, max. Current 0.3CA
Constant Current (A)	-0.2C x 2h + 0.1CA x 12h
Fast	-0.2C x 2h + 0.3CA x 4.0h